

Flap Barrier Gate



Digital Guardian

www.digitalguardian.com



Single Passage



Double Passage

Model No

DG-VE9905




Features

- Reasonable and reliable design, low noise, smooth operation and long service life;
- With functions of anti-tail, anti-reverse pass and so on;
- Card can be set "with memory" or "without memory" functions;
- With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- With infrared anti-clip function (anti-clip when gate is open or running);
- Compatible with IC, ID card, scanning and face recognition,etc.
- Two modes of operation are available: open or closed.
- Various working modes are available, including two-way card reading and one-way card reading,etc.

Parameters

Dimension	1400*280*980mm
Pass width	550mm
Power	50W
Material	Top Cover 1.2mm+boby 0.9mm SUS304
Bar Material	Transparent acrylic flap with RGB light
Movement	Brushless Flap Barrier Gate movement
Infrared Sensor	6 pairs
Indicator Light	RGB indicator light
Drive Unit	Brushless DC Motor 30K 40W
Power Supply	24V 150W
Control Unit	Main Board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C ~+70°C
Humidity	≤90% No condensation
Class of protection	IP4X
Enviroment	Indoor

Product Size

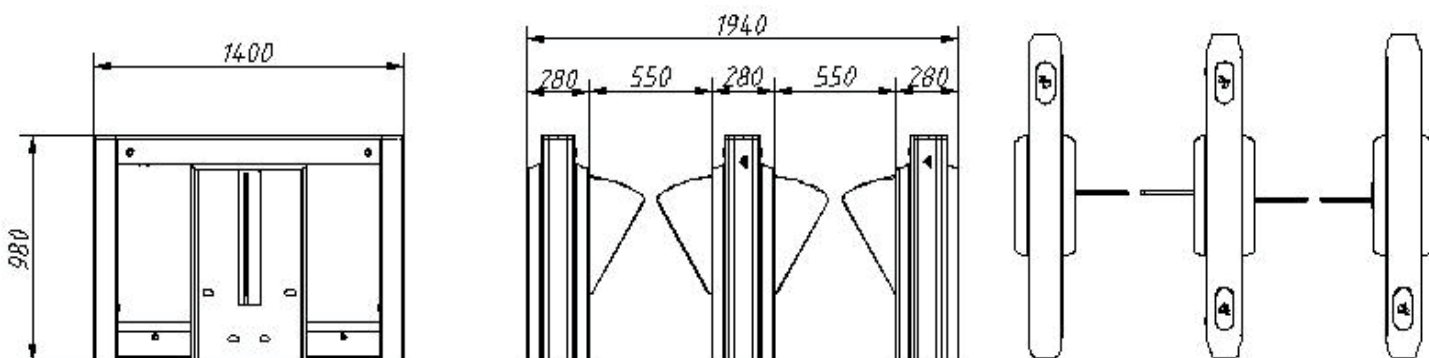

Mailing Address

VOSTOK Trading L.L.C,
304,3rd Floor,Al Tawhidi Building,
Khaleed Bin Waleed Road,
P.O. Box: 27106 - Dubai,
UNITED ARAB EMIRATES.

Contact Details

Tel: (+971 4) 3558816
Fax: (+971 4) 3558817
Email : sales1@digitalgardian.com /
sales2@digitalgardian.com /